

# ZGL120026



### Constant Current Discharge Rating Amperes @ 25°C (77°F)

FV/Time	5M	10M	15M	30M	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
	23.43	16.57	13.10	8.064	4.86	2.54	1.82	1.49	1.23	0.82	0.69	0.36


### Characteristics

Capacity	20 hour rate	7.2AH	
25°C (77°F)	5 hour rate	6.12AH	
Internal Resistance	Full charged Battery 25°C (77°F)	25mΩ	
Capacity affected by Temperature (20 hour rate)	40°C (104°F)	107%	
	25°C (77°F)	100%	
	0°C (32°F)	76%	
	-10°C (14°F)	66%	
Self-Discharge	Batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.		
Standard Terminal	F1		
Max. Discharge Current 25°C (77°F)	72A (5s)		
Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
	(A) ≤ 0.2C	0.2 < (A) < 1.0C	(A) ≥ 1.0C
	Charging (Constant Voltage)	Cycle Initial Charging Current 2.16A Or Small 14.6V~14.8V/ 25°C (77°F) Float 13.6V~13.8V/ 25°C (77°F)	
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.		



### Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		7.2Ah
Dimension	Total Height (with terminals)	100mm (3.94 inches)
	Height	94mm (3.703 inches)
	Length	151mm (5.949 inches)
	Width	65mm (2.561 inches)
Weight		Approx. 2.15kg (4.73lbs)

### Discharge characteristics 25°C (77°F)

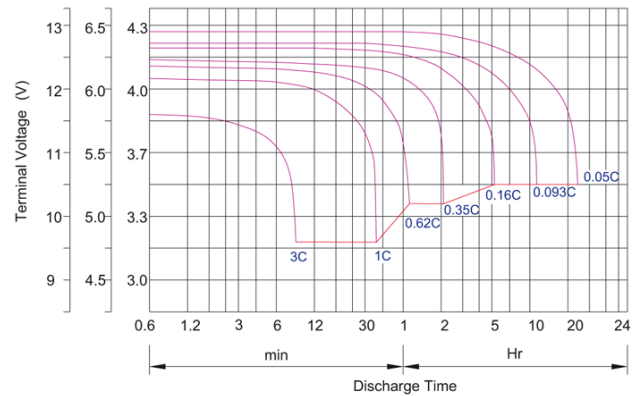

### Charge characteristic Curve for standby use

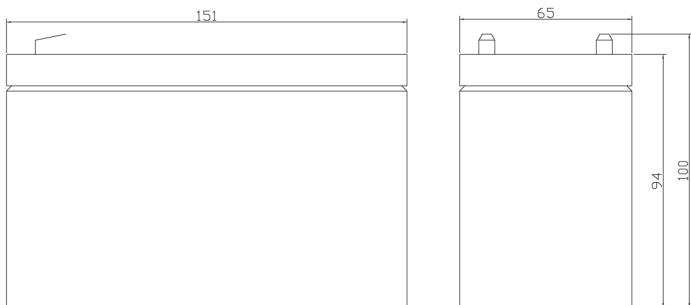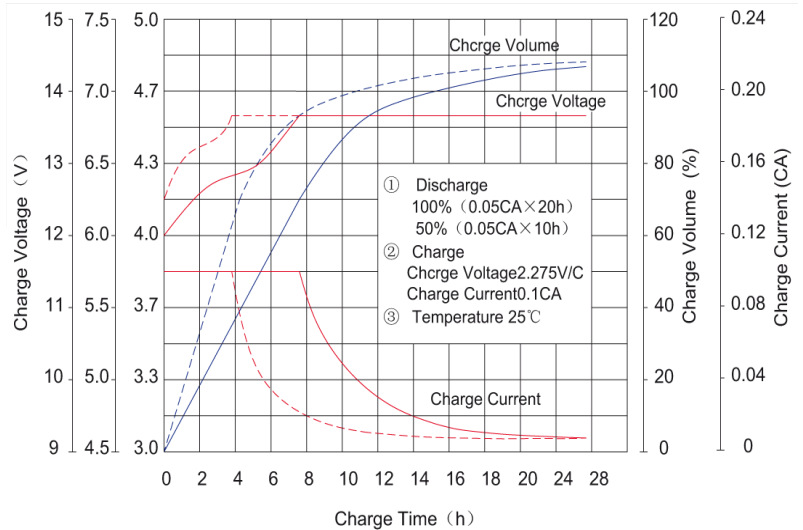

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

DIVISION OF



[www.zenithdcbattery.com](http://www.zenithdcbattery.com)