

SYSTEM **Mille**

MLK 165 **250 Watt**

Technical Specifications

| | | |
|-------------------------------------|-------------------------|--------------------------|
| Component | 2 way System | |
| Size (mm) | ML 165 Woofer | 165 (6 ^{31/2}) |
| | ML 28 Tweeter | 28 (1 ^{11/16}) |
| Power Handling (Watt) | peak | 300 |
| | cont. program | 150 |
| Impedance | Ω | 4 |
| Frequency response | Hz | 35 ÷ 25k |
| Sensitivity | dB/SPL | 92 |
| Crossover included | 2.5 kHz @ 12/12 dB Oct. | |
| Component Adjustment | Tweeter: | 0 ÷ -4,5 dB |
| Sound Control | HFC® | |
| Outer diameter (mm) | Woofer | 168 |
| | Tweeter | |
| | big chamber | 44 |
| | small chamber | 44 |
| Mounting hole diameter (mm) | Woofer | 144 |
| | Tweeter | |
| | big chamber | 38,5 |
| | small chamber | 38,5 |
| Magnet size (mm) | Woofer | 100 |
| | Tweeter | 38 |
| Total depth (mm) | Woofer | 84 |
| | Tweeter | |
| | big chamber | 36 |
| | small chamber | 26 |
| Mounting depth (mm) | Woofer | 80 |
| | Tweeter | |
| | big chamber | 17 |
| | small chamber | 9 |
| Weight of one component (mm) | Woofer | 1,700 |
| | Tweeter | |
| | big chamber | 0,085 |
| | small chamber | 0,079 |
| Voice coil diameter (mm) | Woofer | 36 |
| | Tweeter | 28 |




Grille included



Unparalleled quality; the Klippel Quality Control System is our actual guarantee to always produce a product entirely in compliance with the most challenging international standards.

Option:

MLCX 20 **Bi-Wiring**

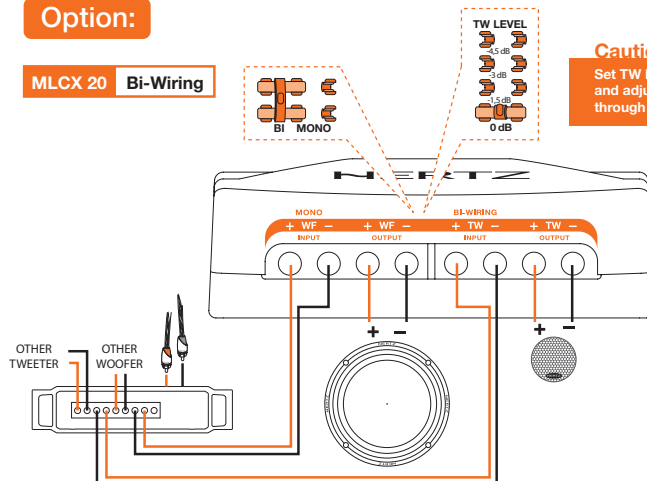

Caution

Set TW Level controls on 0 dB and adjust emission level through the proper amplifier

