

ZPC120032

Characteristics

Capacity 25°C (77°F)	20 hour rate	35AH
Polarity		DX
High rate discharge at 77° F (25°C)	5 sec.	975A
	10 sec.	910A
	15 sec.	825A
	20 sec.	800A
PHCA at 80°F (27°C) for 5 seconds		975A
CCA at 0°F (-18°C)		438A
CA/MCA at 32°F (0°C)		525A
HCA at 80°F (27°C)		605A
Short circuit current		2000A
Operating temperature range	-5°F (-15°C) to 122°F (50°C)	
Standard Terminal		M6


Extended discharge at 77°F (25°C) to 10.02V

F.V./Time	5M	15M	1HR	3HR	10HR	20HR
10.02V	145A	68.7A	22.2A	8.7A	3.3A	1.8A

Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		35Ah
Dimension	Height	167mm (6.57 inches)
	Length	196mm (7.72 inches)
	Width	131mm (5.16 inches)
Weight		Approx. 12.1kg (26.62lbs)
Quantity per pallet		75 pcs

Physical characteristics

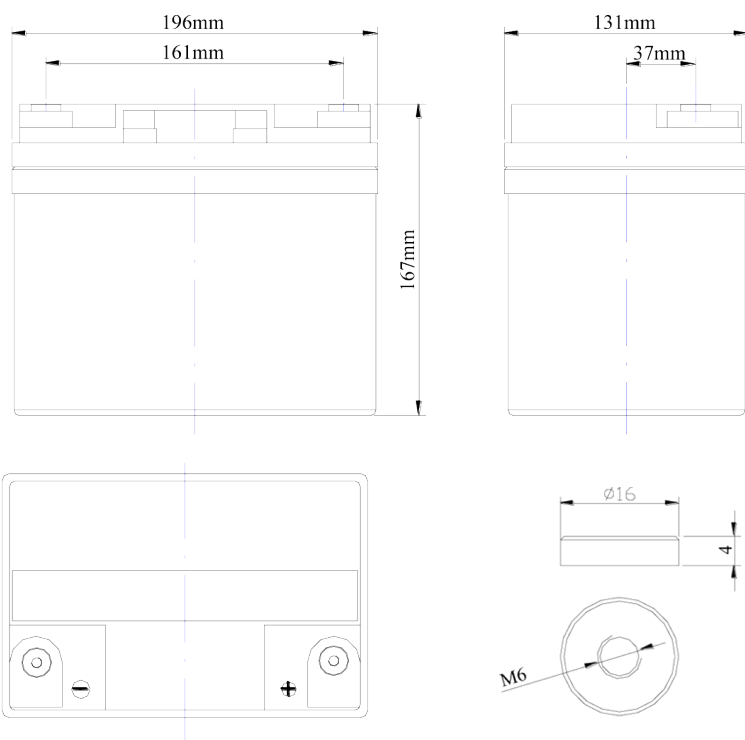

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

DIVISION OF



www.unionbatteryservice.com
www.zenithdcbattery.com