

Zenith

ZPC120040

Characteristics

Capacity 25°C (77°F)	20 hour rate	44AH
Polarity		DX
High rate discharge at 77° F (25°C)	5 sec.	1200A
	10 sec.	1090A
	20 sec.	900A
	30 sec.	825A
PHCA at 80°F (27°C) for 5 seconds		1200A
CCA at 0°F (-18°C)		560A
CA/MCA at 32°F (0°C)		725A
HCA at 80°F (27°C)		860A
Short circuit current		1200A
Operating temperature range	-5°F (-15°C) to 122°F (50°C)	
Standard Terminal		M8


Extended discharge at 77°F (25°C) to 10.02V

F.V/Time	5M	15M	1HR	3HR	10HR	20HR
10.02V	190A	89A	27.2A	11.3A	4.2A	2.2A

Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		44Ah
Dimension	Height	170mm (6.69 inches)
	Length	198mm (7.80 inches)
	Width	166mm (6.54 inches)
Weight		Approx. 15.1kg (33.22lbs)
Quantity per pallet		66 pcs

Physical characteristics

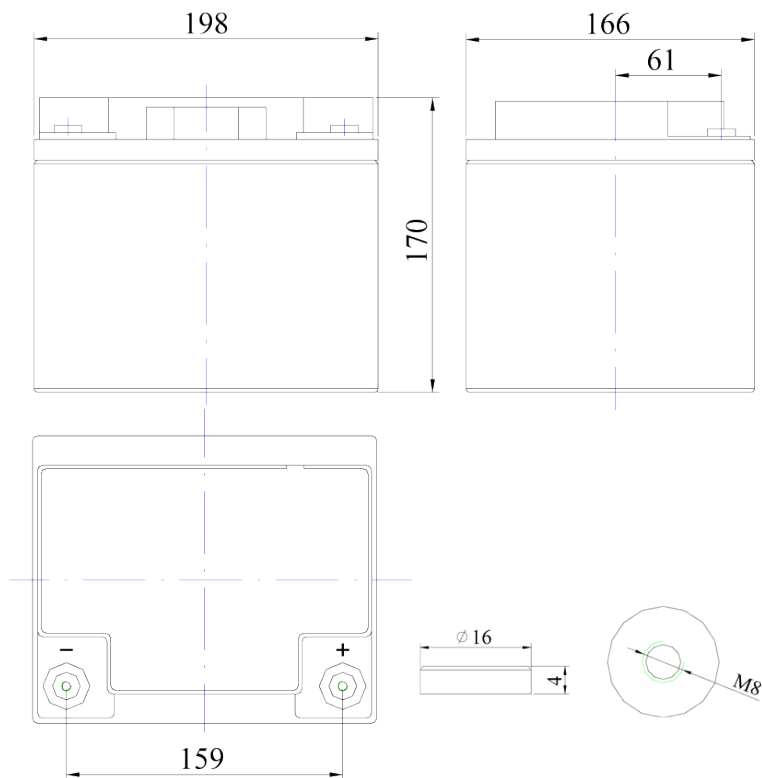

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

DIVISION OF



www.unionbatteryservice.com
www.zenithdcbattery.com