

AUDITOR RCX-130

2-way coaxial kit



WHAT MAKES THE DIFFERENCE

- Dynamic
- Power / compactness ratio
- Removable fastening

TECHNICAL CHARACTERISTICS

Diameter: 5" (130mm)
Voice coil diameter: 1" (25mm)
Max. power: 100W
Nom. power: 50W RMS

Sensitivity (2.83V/1m): 90dB
Frequency response: 65Hz - 21kHz
Inverted dome tweeter: 0^{25/32}" (20mm)

Accessories: grilles, fastening
and screws supplied

Performance
CREATE YOUR SOUND

FOCAL[®]

AUDITOR RCX-130

Woofer (5")




- Inverted dome tweeter
- Polypropylene cone
- Steel basket

SPECIFICATIONS

Nominal power	50W RMS	
Maximum power	100W	
Sensitivity (2,83V/1m)	90dB	
Frequency response	65Hz-21kHz	
Cone type	Polypropylene	
Surround type	Butyl	
Nom. impedance	4Ω	
DC resistance	3.3Ω	
VC diameter	25mm	1"
Net weight	750g	1.65lbs


FREQUENCY RESPONSE/IMPEDANCE

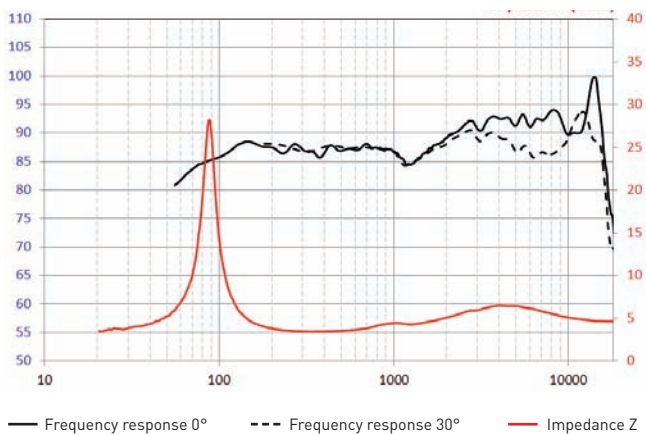

PARAMETERS

Fs	90Hz
Vas	2.5l
Qts	0.8
Qes	0.93
Qms	7
Re	3.3 Ω
Sd	78cm ²
Cms	0.3mm/N
Mms	10g
Bl	4.5 N/A

MECHANICAL DRAWING

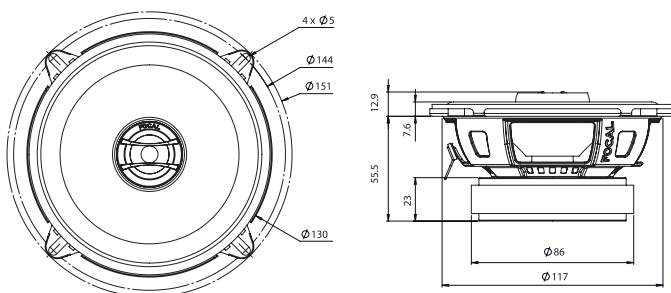

Performance
CREATE YOUR SOUND

FOCAL