

AUDITOR RCX-690

3-way coaxial Kit, elliptic



WHAT MAKES THE DIFFERENCE

- 3 ways
- High power handling

TECHNICAL CHARACTERISTICS

Diameter: 6"x9" (164x235mm)
Voice coil diameter: 1³/₈" (35mm)
Max. power: 160W
Nom. power: 80W RMS

Sensitivity (2.83V/1m): 92dB
Frequency response: 50Hz - 20kHz
Mylar tweeter / medium

Accessories: grilles, fastening
and screws supplied

Performance
CREATE YOUR SOUND

FOCAL[®]

AUDITOR RCX-690

Woofer (6x9")




- Inverted dome tweeter
- Polypropylene cone
- Steel basket

SPECIFICATIONS

Nominal power	80W RMS	
Maximum power	160W	
Sensitivity (2,83V/1m)	92dB	
Frequency response	50Hz-20kHz	
Cone type	Polypropylene	
Surround type	Butyl	
Nom. impedance	4Ω	
DC resistance	3.4Ω	
VC diameter	35mm	1 3/8"
Net weight	1800g	4lbs


FREQUENCY RESPONSE/IMPEDANCE

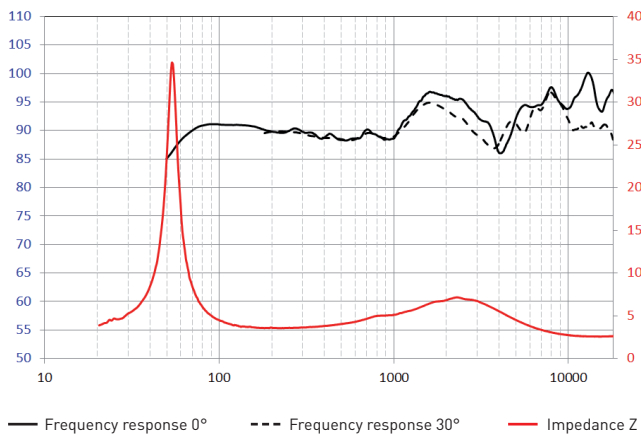

PARAMETERS

Fs	53Hz
Vas	24l
Qts	0.76
Qes	0.85
Qms	7.4
Re	3.4Ω
Sd	217cm ²
Cms	0.35mm/N
Mms	25g
Bl	5.8 N/A

MECHANICAL DRAWING

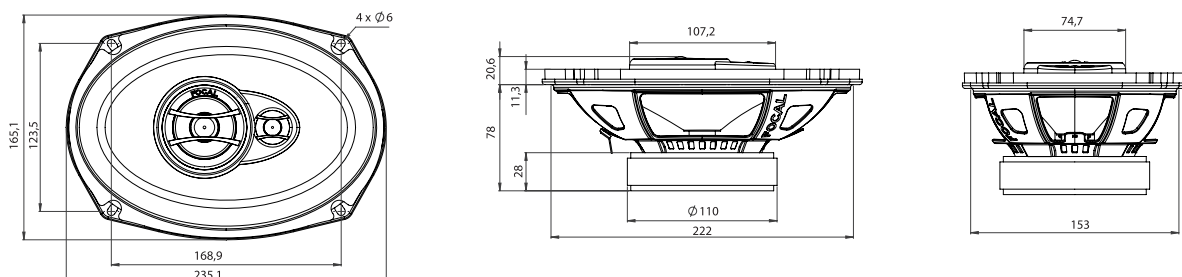

Performance
CREATE YOUR SOUND

FOCAL