

AUDITOR RCX-165

2-way coaxial kit



WHAT MAKES THE DIFFERENCE

- Power handling
- High dynamic

TECHNICAL CHARACTERISTICS

Diameter: 6 1/2" (165mm)
Voice coil diameter: 1" (25mm)
Max. power: 120W
Nom. power: 60W RMS

Sensitivity (2.83V/1m): 91.5dB
Frequency response: 60Hz - 21kHz
Inverted dome tweeter: 0²⁵/32" (20mm)

Accessories: grilles, fastening
and screws supplied

Performance
CREATE YOUR SOUND

FOCAL

AUDITOR RCX-165

Woofer (6¹/₂"




- Inverted dome tweeter
- Polypropylene cone
- Steel basket

SPECIFICATIONS

Nominal power	60W RMS	
Maximum power	120W	
Sensitivity (2,83V/1m)	91.5dB	
Frequency response	60Hz-21kHz	
Cone type	Polypropylene	
Surround type	Butyl	
Nom. impedance	4Ω	
DC resistance	3.3Ω	
VC diameter	25mm	1"
Net weight	900g	1.98lbs


FREQUENCY RESPONSE/IMPEDANCE

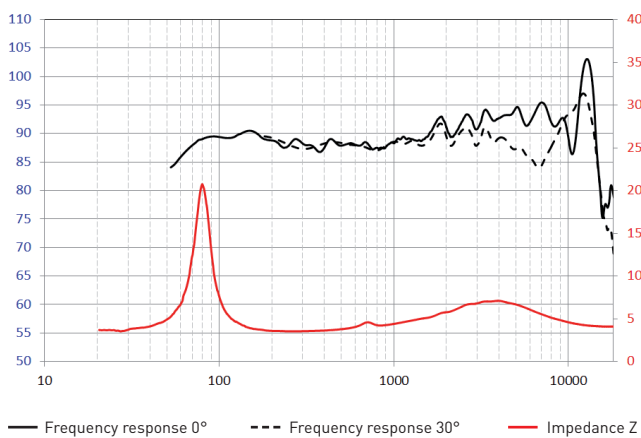

PARAMETERS

Fs	80Hz
Vas	9l
Qts	0.95
Qes	1.2
Qms	7
Re	3.3Ω
Sd	132cm ²
Cms	0.32mm/N
Mms	12.3g
Bl	4.3 N/A

MECHANICAL DRAWING

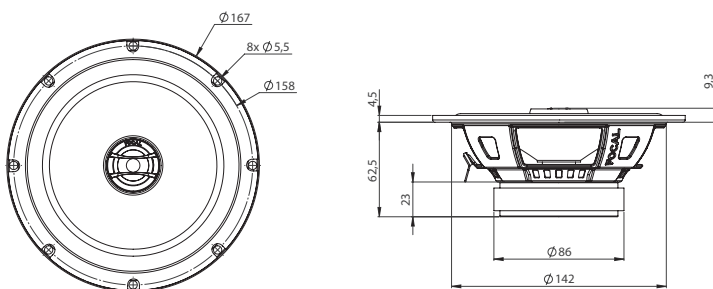

Performance
CREATE YOUR SOUND

FOCAL