

## CODICE/CODE: **ZLS120110**

Batteria sigillata AGM DEEP-CYCLE (uso ciclico) al silicone  
Silicon DEEP-CYCLE AGM maintenance free battery




Volt		12V
Capacity/capacità 25°C	20h (1.85V/cell)	16.5Ah
	5h (1.80V/cell)	13.5Ah
	3h (1.75V/cell)	12.7Ah
	2h (1.75V/cell)	12.0Ah
Capacity affected by Temperature/Effetti della temperature sulla capacità	40°C	102%
	25°C	100%
	10°C	90%
	0°C	80%
	-10°C	70%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	70%
Charge cycle/ Ciclo di carica	IU + h	"In" max.4Amp; "V1" 2.43V/cell
	IUIa	

Battery Dimensions/ Dimensioni batteria	L/L	150mm
	W/P	100mm
	H/A	100mm
	Tot- H/A	103mm
Weight/peso		4.3Kg
Pit. Qt. / Qt per pallet		200
Terminal/terminal		F2
Case/contenitore		ABS
Internal impedance/ resistenza interna		<10mΩ

### Charge cycle for sealed batteries (GEL/AGM): IU + holding

I - V Recommended for Stand-By applications

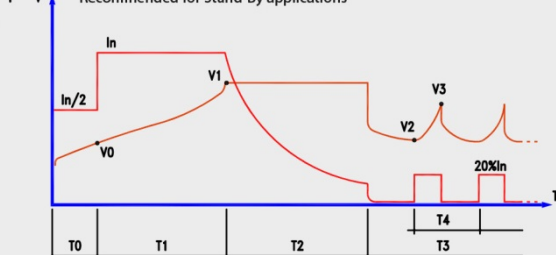

In = PROGRAMMED CAPACITY/10

V0 = 1,90 V/CELL

V1 = PROGRAMMED VALUE

V2 = 2,10 V/CELL

V3 = 2,30 V/CELL

T0 = MAX. 1 HR

T1 = MAX. 12 HRS

T2 = T1 (MIN. 2-MAX. 5 HRS)

T3 = UNLIMITED

